



System 50 - Antistatic (AS)

- Metal hood recommended when extracting gases, fumes and light dust concentrations
- Diameter of hood: Ø200 mm
- Hood and connection tube made of chromated TCP Aluminium for permanent conductivity
- Flange of conductive polypropylene (PP)



Capture efficiency

The relative capture efficiency is not optimal for this hood position. Other hood arrangements have been made for hood sizes and hood diameters. See article 1-10024.

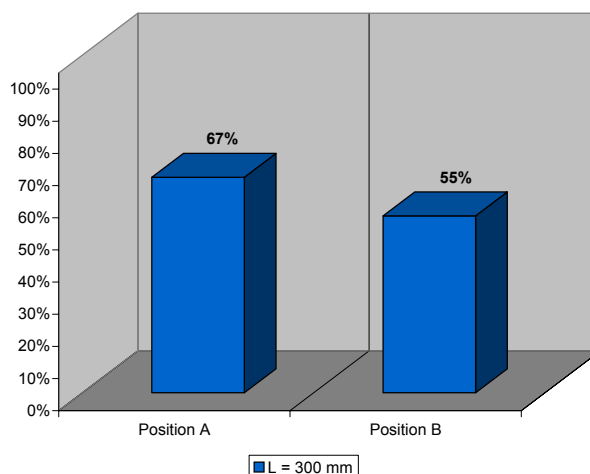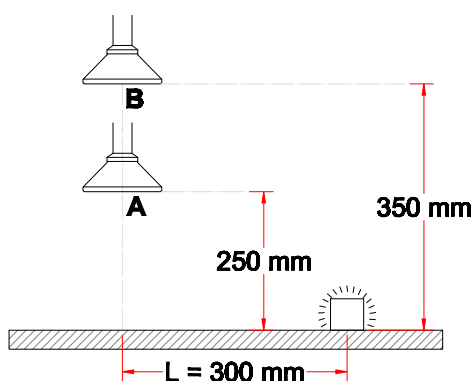

Drawing

Metal hood 1-5024-6

alsident[®]
system

A cleaner working environment

