

Invest your time in soldering, not cleaning

Cleaning Systems

For good thermal transfer, keep the tip tinned thus free from oxides.

Clean the tip in less than a second



With automatic cleaners you **save time** and optimize production.

Improve heat transfer





A clean tip is always easier to tin, resulting in **higher** quality solder joints.

Splashguard

CLMS Junior Tip Cleaner

The ideal partner to any soldering station

Two modes of operation

The motorized brushes start by pushing the button or by selecting the continuous mode.



Save space

You can easily fit the tip cleaner into your workspace thanks to its reduced size.



Brushes

CL4008

Fiber Brushes

The composition, size and thickness of the fibers ensure the **most efficient cleaning** and the least damage while cleaning the tip.








JBC offers effective, practical and affordable methods to prevent splashing and extend tip life:





CLMUP Automatic Tip Cleaner with Fiber Brushes (non-metal)

CLMU Automatic Tip Cleaner with Metal Brushes



These cleaners are excellent for cleaning tips of different shapes and sizes. You can easily switch between sensor and continuous mode by pressing the top buttons.

Brushes

CL2008 / CL2007

Fiber Brushes

provides a **soft cleaning**, especially recommended for regular usage to improve tip life. Supplied with CLMUP.



CL1008 / CL1007


Metal Brushes provides a thorough cleaning to recover the tip, increasing heat transfer

Supplied with CLMU.



CL Manual Tip Cleaner

A complete cleaning system with splashguard and antisplash membrane to keep the workspace clean and free of solder particles.

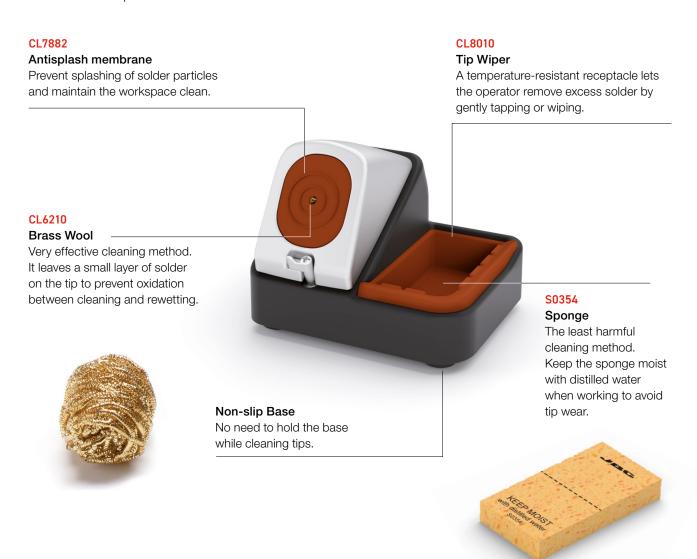

Specifications

	CL	CLMS	CLMU / CLMUP
Dimensions	112 x 89 x 90 mm / 4.4 x 3.5 x 3.5 in	95 x 91 x 112 mm / 3.7 x 3.6 x 4.4 in	128 x 131 x 137 mm / 5. x 5.1 x 5.4 in
Weight	0.88 Kg / 1.93 lb	1.45 kg / 3.20 lb	2.1 Kg / 4.63 lb
Operating modes	Manual	Switch & Continuous	Sensor & Continuous
Brush diameter		Ø 34 mm / 1.33 in	Ø 50 mm / 1.97 in
Brush speed		550 rpm	750 rpm
		650 rpm (continuous mode)	
Silent operation		30 dB at 30 cm	25 dB at 30 cm
Vertical position			-
AC Adapter		Input: 100 - 240V, 50/60 Hz	Input: 100 - 240V, 50/60Hz
		Output: DC 12V, 1 A	Output: DC 24V, 2 A











