


DRG No  
BL/D5060/01-08 INST

THIRD ANGLE  
PROJECTION

USED ON

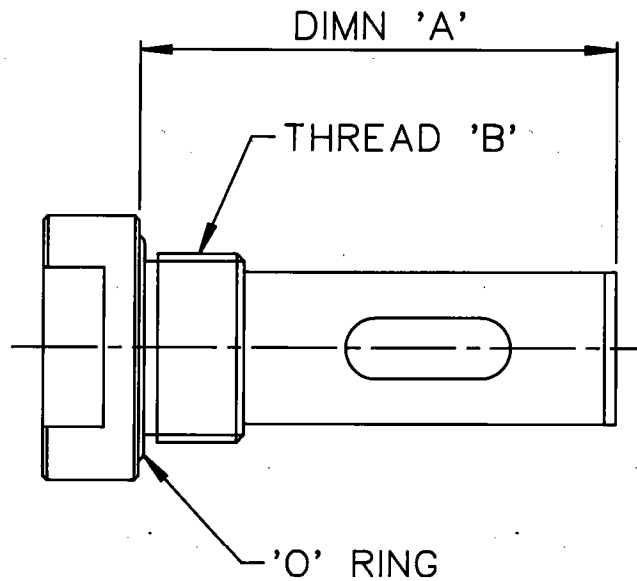

PART No	DESCRIPTION	NOMINAL DESICCANT WEIGHT	NOMINAL TOTAL WEIGHT	DIMN 'A'	THREAD 'B'
BL/D5060/01	RIHP6M/RCT5MBSG	2g	26g	37.5	M20x1.5
BL/D5060/02	RIHP6M/RCT6MBSG	4g	31g	64	M20x1.5
BL/D5060/03	RIHP6M/RCT7MBSG	6g	37g	89	M20x1.5
BL/D5060/04	RIHP6M/RCT8MBSG	8g	42g	114	M20x1.5
BL/D5060/05	RIHP8M/RCT35MBSG	10g	55g	64	M25x1.5
BL/D5060/06	RIHP8M/RCT36MBSG	15g	72g	109	M25x1.5
BL/D5060/07	RIHP10M/RCT37MBSG	25g	112g	84	M35x1.5
BL/D5060/08	RIHP10M/RCT38MBSG	45g	145g	129	M35x1.5

DESICCANT: BEADED SILICA GEL TO SPECIFICATION BS7554.

MATERIAL ALUMINIUM ALLOY	PROTECTIVE FINISH ANODISED				
		REDRAWN - DIMN A CHANGED FILLER PLUG DELETED	5438	2	12/4/99
EST. WT. —				1	10/8/91
		CHANGE	MOD No	ISSUE	DATE
DIMNS IN mm	SURFACE ROUGHNESS —	TOLERANCES			
SCALE N.T.S					
BROWNELL LIMITED LONDON NW10			DRAWN LJ	CHKD 	
SUB CONT. —		SUB CONT. DRG REF. —			
TITLE DESICCANT CONTAINER DEHUMIDIFIER (PANEL MOUNTING) R.F. SCREENED		DRAWING No BL/D5060/01-08 INST			

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD  
AND MAY NOT BE COPIED OR REPRODUCED WITHOUT  
THEIR PRIOR WRITTEN PERMISSION